


Shooting Marbles

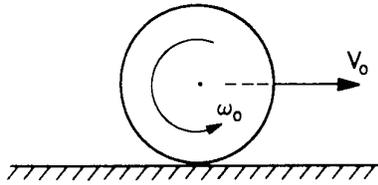

An amusing trick is to press a finger down on a marble, on a horizontal table top, in such a way that the marble is projected along the table with an initial linear speed V_0 and an initial backward rotational speed ω_0 , ω_0 being about a horizontal axis perpendicular to V_0 . The coefficient of sliding friction between marble and top is constant. The marble has radius R .

- a) What relationship must hold between V_0 , R , and ω_0 for the marble to slide to a complete stop?
- b) What relationship must hold between V_0 , R , and ω_0 for the marble to skid to a stop and then start returning toward its initial position, with a final constant linear speed of $3/7 V_0$?

Sukumar Chandra's Solution (using kinematics)

The kinetic force of friction, $f_k = \mu Mg$, acting horizontally leftward through the point of contact produces leftward translational acceleration μg [Force / mass] and rotational anticlockwise acceleration, $\alpha = 5 \mu g / 2R$ [torque / I_{cm}].

- a) If the marble comes to a stop after time t , then $V_0 = \mu g t$ [since, $v = u + at$] and $\omega_0 = \alpha t$ [since, $\omega = \omega_0 + \alpha t$]. Eliminating t , we get $V_0 = 2 \omega_0 R / 5$.
- b) Final velocity is $-3V_0 / 7$, taking leftward negative. If the marble achieve this position t second after start then, $-3V_0 / 7 = V_0 - \mu g t$. Or,

$$\mu g t = 10V_0 / 7. \quad (1)$$

At this instant it must be rolling with clockwise angular speed $3V_0 / 7R$ as $V = \omega R$ must be satisfied for pure rolling. Thus $3V_0 / 7R = \omega_0 - \alpha t$ or, $3V_0 / 7R = \omega_0 - 5 \mu g t / 2R$. Or,

$$\mu g t = 2R\omega_0 / 5 - 6V_0 / 35. \quad (2)$$

From (1) and (2) we get, $10V_0 / 7 = 2R\omega_0 / 5 - 6V_0 / 35$, or $V_0 = \omega_0 R / 4$.